


Time-Delay Ferrule Fuse

13/32" x 1-1/2"

FNM

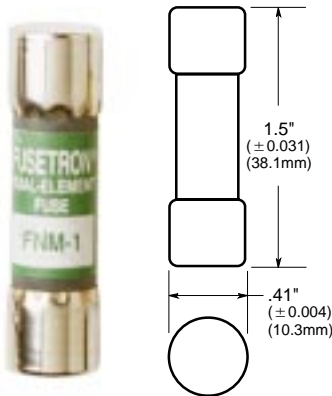

CATALOG SYMBOL: FNM
 TIME-DELAY
 1/10 TO 30 AMPERES
 INTERRUPTING RATING - SEE CHART BELOW
 UL LISTED: STD. 248-14, 0-10/250V AC; 12-15/125V AC
 FILE #E19180, GUIDE #JDYX
 CSA CERTIFIED: 1-10/250V AC; CLASS 1422-01,
 12-15/125V AC; FILE 53787
 DC RATING: 1-15A rated 125V DC and 1.6 KAIC.

Electrical Ratings (Catalog Symbol and Amperes)

250 Volts AC		250 Volts AC		250 Volts AC		125 Volts AC	
IR		IR		IR			
FNM-1/10		FNM-1-1/8		FNM-4		FNM-12	10,000
FNM-1/8		FNM-1-1/4		FNM-4-1/2		FNM-15	@ 125V AC
FNM-15/100		FNM-1-4/10		FNM-5		-	
FNM-2/10		FNM-1-1/2		FNM-5-6/10		-	
FNM-1/4	35A @	FNM-1-6/10	100A @	FNM-6		32 Volts AC	
FNM-3/10	250VAC	FNM-1-8/10	250VAC	FNM-6-1/4	200A @	FNM-20	
FNM-4/10	10,000	FNM-2	10,000	FNM-7	250VAC	FNM-25	
FNM-1/2	@	FNM-2-1/4	@	FNM-8	10,000 @	FNM-30	
FNM-6/10	125VAC	FNM-2-1/2	125VAC	FNM-9	125VAC	-	
FNM-3/4		FNM-2-8/10		FNM-10		-	
FNM-8/10		FNM-3		-		-	
FNM-1		FNM-3-2/10		-		-	
-		FNM-3-1/2		-		-	

If 250V AC is needed for 12-30 amps, use FNM series.


Carton Quantity and Weight

Ampere Ratings	Carton Qty	Weight	
		Lbs.	Kg.
0-30	10	.125	.057

CE logo denotes compliance with European Union Low Voltage Directive (50-1000V AC, 75-1500V DC). Refer to BIF document #8002 or contact Bussmann Application Engineering at 314-527-1270 for more information.

- Fibre tube.
- For circuits with high inrush currents.
- Formerly designated 5AB.
- Fusetron® Dual-Element fuse.

Time-Current Characteristic Curves—Average Melt

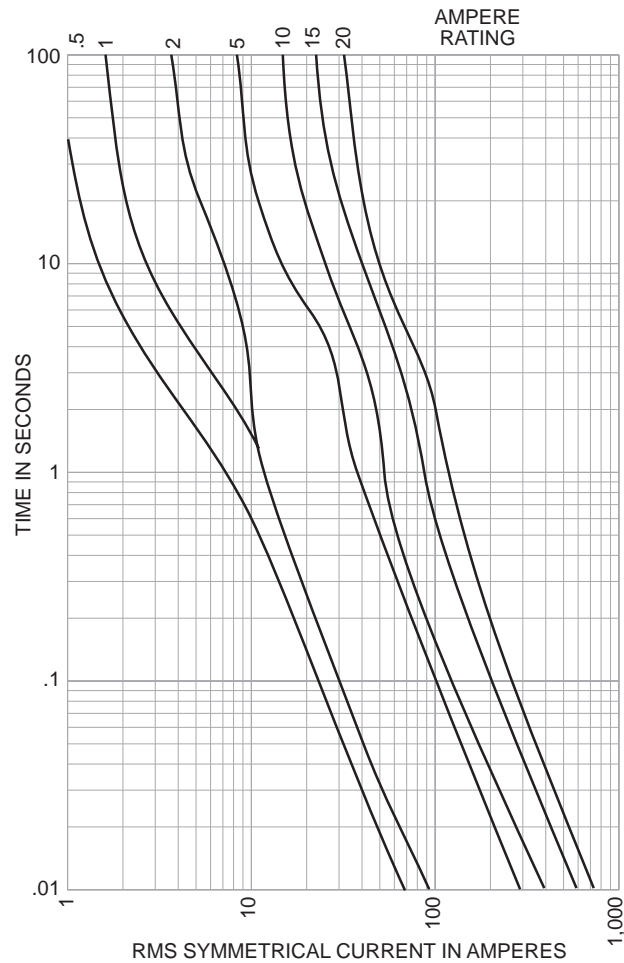

Fuseblock Catalog Numbers

Poles	Terminal Type		
	Screw With Quick Connect	Pressure Plate w/Quick Connect	Box Lug
1	BM6031SQ	BM6031PQ	BM6031B
2	BM6032SQ	BM6032PQ	BM6032B
3	BM6033SQ	BM6033PQ	BM6033B

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.