
Blade-Type Fuses 32 Volts DC, 2-30 Amps

ATM

Dimensional Data



CATALOG SYMBOL: ATM FAST-ACTING 2 TO 30 AMPERES 32 VOLTS DC

Electrical Ratings (Catalog Symbol, Amp Rating, and Color)

ATM-2	Gray	ATM-7-1/2	Brown	ATM-25	Natural White
ATM-3	Violet	ATM-10	Red	ATM-30	Green
ATM-4	Pink	ATM-15	Lt. Blue	_	_
ATM-5	Tan	ATM-20	Yellow	_	_


Shelf Carton Quantity and Weight

Fuse	Fuse	No. of	Wgt.	Dimensions	Volume
Type	Qty.	Boxes	(Lbs.)	(Inches)	(Cu. Ins.)
ATM	100	20 (5-in)	0.40	2.88 x 3.5 x 1.75	17.6

Recommended Bussmann Fuseholders

Blade-Type								
НН	HHM Fuseholde	r w/Cover		#12 Lead Wire; 4" Length				
НН	HHM-B Body Only		3-30 Amps					
НН	HHM-C Cover Only	Cover Only		4 Longui				
ΗН	HHL Fuseholde	r w/Cover	2 20 Amna	#16 Lead Wire;				
ΉН	HHL-B Body Only		2–20 Amps	4" Length				
HH	HHL-B Body Only							

Time-Current Characteristic Curves-Average Melt

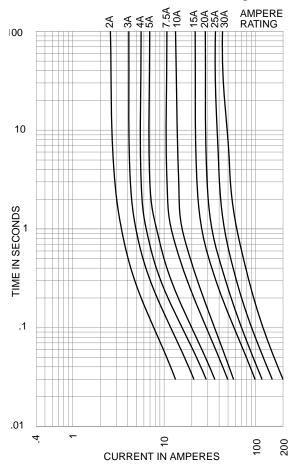

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

