


Pin Indicating Type


Dual-Element, Time-Delay

1/10-30 Amps

FNA

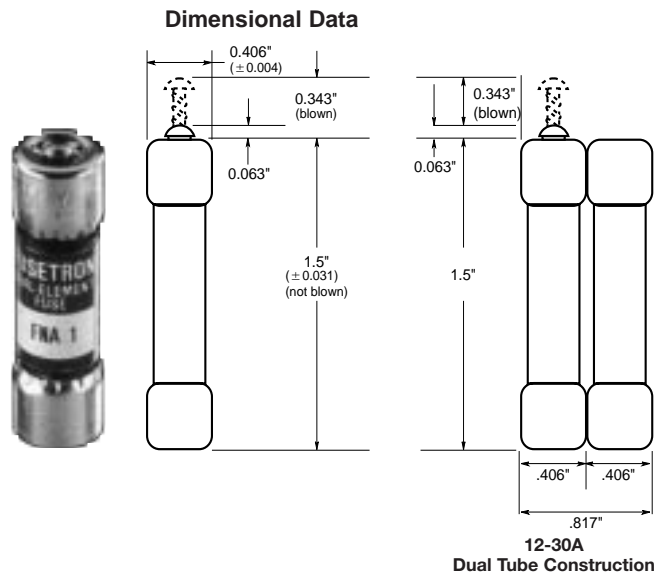

Time-Current Characteristic Curves—Average Melt

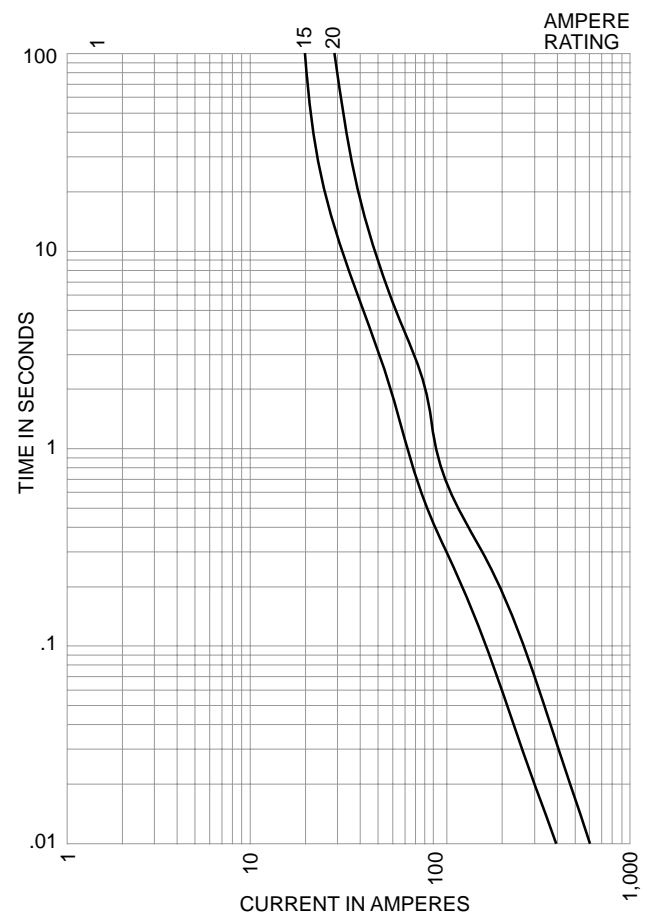

CATALOG SYMBOL: FNA (5AG) 1/10-10A
 DUAL-ELEMENT, TIME-DELAY
 1/10 TO 30 AMPERES
 U.L. RECOGNIZED, STD 248-14
 0-8, 10/250V AC
 (GUIDE # JDYX, FILE # E19180)
 CSA CERTIFIED
 0-10/125V AC
 (CLASS 1422-01, FILE # 53787)

Electrical Ratings (Catalog Symbol and Amperes)

250 Volts AC IR*	125 Volts AC IR	125 Volts AC IR	125 Volts AC
FNA-1/10	FNA-1	FNA-3	FNA-9
FNA-1/8	FNA-1-1/8	FNA-3-2/10	FNA-10 IR
FNA-15/100	FNA-1-1/4	FNA-3-1/2	FNA-12 10,000A
FNA-2/10	FNA-1-4/10	FNA-4	FNA-15
FNA-1/4	FNA-1-1/2	FNA-4-1/2	32 Volts AC
FNA-3/10 IR 35A	FNA-1-6/10 IR 10,000A	FNA-5 10,000A	FNA-20
FNA-4/10	FNA-1-8/10	FNA-5-6/10 10,000A	FNA-25
FNA-1/2	FNA-2	FNA-6	FNA-30
FNA-6/10	FNA-2-1/4	FNA-6-1/4	—
FNA-3/4	FNA-2-1/2	FNA-7	—
FNA-8/10	FNA-2-8/10	FNA-8	—

*Have interrupting rating of 10,000A at 125V AC.

Carton Quantity and Weight

Ampere Ratings	Carton Qty	Weight Lbs.	Kg.
0-10	100	1.5	0.650
12-30	100	3.0	1.36

- Use in power electronic circuits in which there are high inrush currents and fuse openings must be quickly apparent.
- Has silver-plated pin for positive, electrical signal activation.
- FNAs larger than 10 amperes have dual-tube construction.
- Mount in Buss fuseblock 3839 for signal indication.
- Mount in HPF-C panel-mounted fuseholder or BM series fuseblocks for visual indication.

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000V AC, 75-1500V DC). Refer to BIF document #8002 or contact Bussmann Application Engineering at 314-527-1270 for more information.