


TRON® In-Line Fuseholders

Single-Pole for Solid Neutral

HET Series

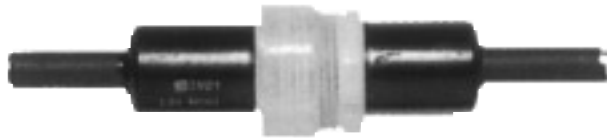

Non-Break-A-Way Holders
 Catalog Symbol: HET-AA, HET-AB, HET-JJ, and HET-JL
 In-Line Fuseholders, Single-Pole

For break-a-way holders, see page 2

Waterproof

Temperature Rating (RTI):

Body: 150°C

Break-A-Way Terminals: 125°C

HET — A HEB fuseholder with a permanently installed solid neutral. Easily identified by white plastic coupling nut.

Example:


A single-pole, in-line holder for a neutral is required. One solid #8 is on the load side, copper crimp for connection. A solid #6 is on the line side, and a copper crimp is required.

Recommended torque on coupling nut: 10-20 in-lb.

1. Choose HET- series.
2. Choose "A" for load side.
3. Choose "B" for line side.

Complete Catalog Number: HET-AB.

Packaging & Ordering Information:



Catalog and Specification Data - Non-Break-A-Way

Conductor Terminals

Type Terminal	Conductors			Catalog Symbol Load & Line (2 & 3)
	Size	No. Per Terminal	Solid Stranded	
	#12 to #8	1	• •	A
	#12	2	• •	
	#10	2	• •	B
	#6	1	• •	
#4	1	• •		

Copper Set-Screw

	#12 to #3	1	• •	J
--	-----------	---	-----	---

Aluminum Set-Screw

	#12 to #2	1	• •	L
--	-----------	---	-----	---

Catalog Data — Insulating Boots

	Catalog Numbers	Type
	1A0512	Single Conductor
	1A0513	Two Conductor

Insulating boots are not included with non-break-a-way parts and must be ordered separately. They come standard with the break-a-way series. The HET-AW & HET-JW do not have the boots. These catalog items do not have a break-a-way receptacle.

When boots are utilized, extra heat retention requires that fuses are sized at a minimum of 200% of the RMS load current.

TRON® In-Line Fuseholders

Single-Pole for Solid Neutral

HET Series

Break-A-Way Holders

Catalog Symbol: HET-AW-RLC-A, HET-AW-RLC-B, HET-AW-RLC-C, HET-AW-RLC-J, HET-AW-RYC, HET-BW-RLC-B, HET-BW-RYC, HET-JW, HET-JW-RLC-J, HET-JW-RYC, and HET-AW

In-Line Fuseholders, Single-Pole

Temperature Rating (RTI):

Body: 150°C

Break-A-Way Terminals: 125°C

Example:


A single-pole, in-line, break-a-way holder for a neutral is requested. A single #10 solid, copper crimp is on the load side. A single #10, solid wire and a copper crimp is needed on the line side. Recommended torque on coupling nut: 10-20 in-lb.

1. Choose HET- series.
2. Choose "A" from 1st page for load side.
3. Choose "W" for break-a-way requirement.
4. Choose "RLC-A" for break-a-way receptacle on line side.



Complete Catalog Number: HET-AW-RLC-A

Catalog and Specification Data

Break-A-Way Receptacles

Type Terminal	Conductor Data Size	Conductor Data		Catalog Symbol Line Terminal (3)
		No. Per Terminal	Solid Stranded	
	#12 to #8	1	• •	-RLC-A
	#6	1	• •	-RLC-B
	#4	1	• •	-RLC-C


Copper Set-Screw

	#12 to #3	1	• •	-RLC-J
	#12 to #3	2	• •	-RYC

Solid Break-A-Way

	(Required with break-a-way Receptacle)			W
--	--	--	--	---

Packaging & Ordering Information:



This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.